

CK 200 A


7000427

- Duct fan with circular connections.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Low sound levels.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- For speed control a transformer or electronic speed controller can be connected.


- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system.
- A duct connected fan can be installed outside or in damp environments.
- Easy installation in any position.




PRESSURE/FLOW

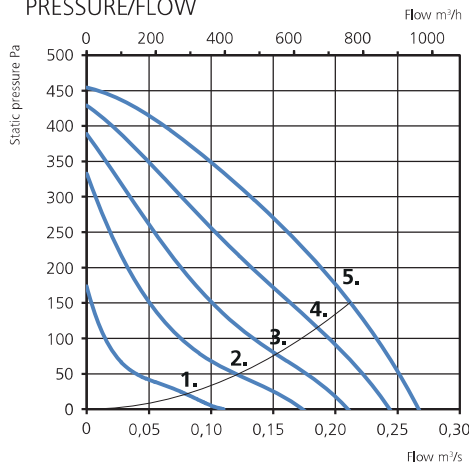

POWER/FLOW

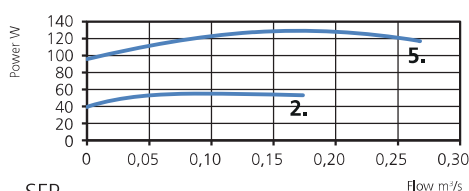

SFP

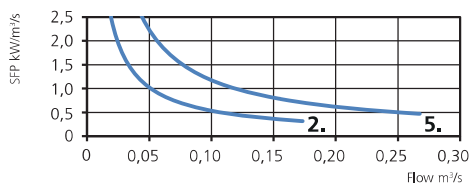

TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz (60 Hz)
Phase	1 ~
Current	0.57 A
Power	129 W
Speed	2630 r.p.m.
Capacitor	4 µF
Max. temp of transported air	60 °C
Sound pressure level, 3 m	43 dB(A)
Weight	4.1 kg
Wiring diagram	4040001

ACCESSORIES

- Mounting bracket Kit MB
- Mounting clamp MK 200
- Safety grille BSV 200
- Back draught shutter RSK 200
- Louvre YG 200
- Louvre shutter VK 200
- Filterbox FLK 200
- Filterbox FLF 200
- Silencer LDC 200
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0
- Local Demand Controller Kit

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
5.Surrounding 230 V	50	25	31	43	47	43	37	36	29
5.Outlet 230 V	70	49	53	62	59	64	66	62	53
5.Inlet 230 V	69	46	57	62	61	63	62	60	52
4.Inlet 165 V	67	44	55	60	58	61	59	56	47
3.Inlet 135 V	63	43	53	55	54	58	56	52	41
2.Inlet 110 V	58	42	47	49	48	53	51	39	30
1.Inlet 80 V	45	33	36	37	39	41	32	21	12

TRANSFORMER STEPS

1. 80 V 2. 110 V 3. 135 V 4. 165 V 5. 230 V

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or by scanning QR code.

DIMENSIONS (mm)

