

CK 315 B

7000067


- Duct fan with circular connections.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Low sound levels.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.

- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system.
- When duct connected the fan can be installed outside or in damp environments.
- Easy installation in any position.



This product is not sold within the EU.

PRESSURE/FLOW

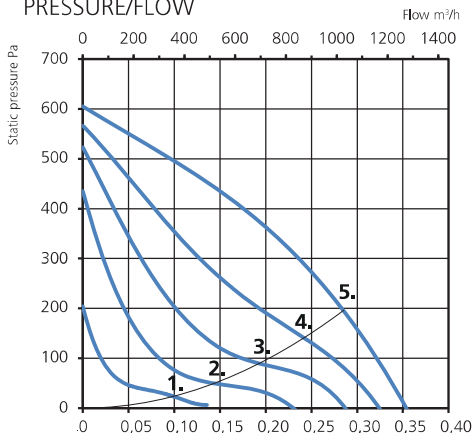


TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.84 A
Power	192 W
Speed	2590 r.p.m.
Capacitor	5 µF
Max. temp of transported air	65 °C
Sound pressure level, 3 m	46 dB(A)
Weight	5.8 kg
Wiring diagram	4040001


ACCESSORIES

- Mounting bracket Kit MB
- Mounting clamp MK 315
- Safety grille BSV 315
- Back draught shutter RSK 315
- Louvre YG 315
- Louvre shutter VK 315
- Filterbox FLK 315
- Filterbox FLF 315
- Silencer LDC 315
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0
- Speed controller VRS 2.0

POWER/FLOW

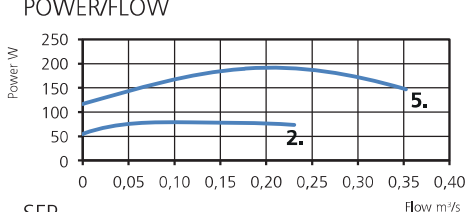

SFP

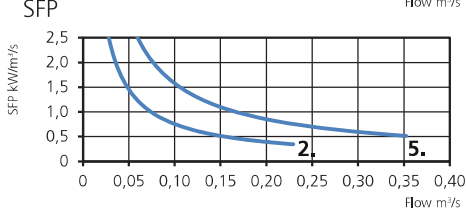

SOUND DATA

	L_{wa} tot dB (A)	63	125	250	500	1K	2K	4K	8K
5.Surrounding 230 V	53	30	44	41	48	44	45	43	34
5.Outlet 230 V	77	57	58	73	65	66	69	69	64
5.Inlet 230 V	74	52	57	62	62	63	69	69	66
4.Inlet 165 V	70	49	54	59	59	60	66	64	62
3.Inlet 135 V	66	45	50	54	55	55	62	60	48
2.Inlet 110 V	60	40	48	46	47	49	54	57	33
1.Inlet 80 V	48	34	39	38	38	44	42	26	19

TRANSFORMER STEPS

1. 80 V 2. 110 V 3. 135 V 4. 165 V 5. 230 V

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or by scanning QR code.

DIMENSIONS (mm)

