


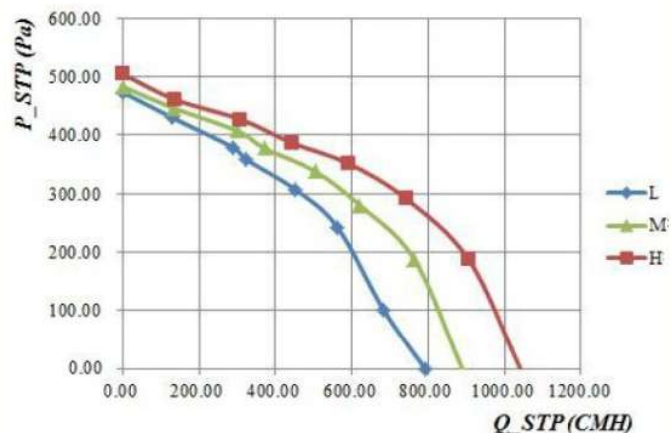

Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

TYPE		Voltage[V]	Frequency [Hz]	capacitor [±5% μF]	Current draw [A] (±10%)	Power input[W] (±10%)	Speed[r/min] (±10%)	Air flow [m³/h] (±10%)	Noise level Lp[dB(A)]	Insulation class
DH146A1-AG5-25 AM068A1-AG5-58	H	230	50	8/450	1.3	300	1270	1000	≤69	F
	M				1.16	268	1100	850		
	L				1.07	245	980	750		

