




Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally
Motor Insulation Class : F
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE, UL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	Speed	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
DH230A2-AG5-01 (FS 230)	AM068A2-AG5-01	230	50	H	2630	1548	780	734	3.2	69	16/450
				M	1950	1148	600	465	2.1	61	
				L	1620	954	500	330	1.5	57	

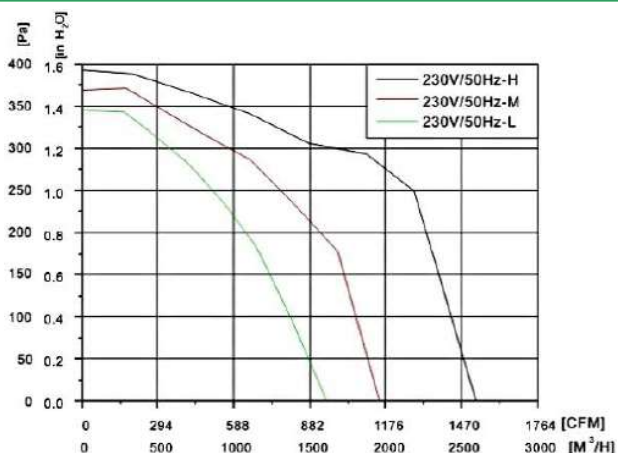