


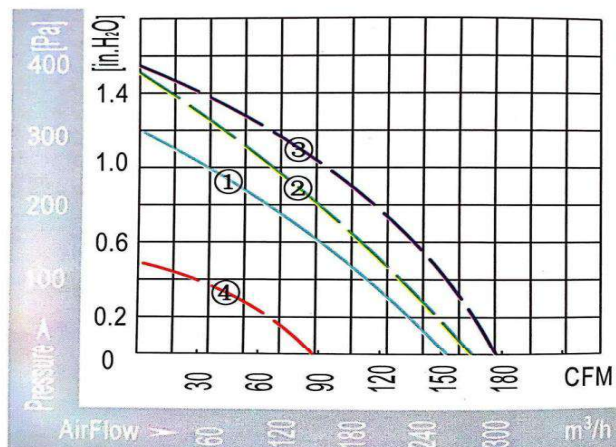

**Material** : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

**Type of protection** : IP44

**Bearing** : Ball Bearings

**Operation Mode** : S1

**Protection** : Thermal Overload Protector (TOP) wired Internally

**Motor Insulation Class** : F

**Direction of Rotation** : Anticlockwise, see on the leads.

**Amb. Temp** : -40 ~ +60°C

**Approvals** : CCC, CE, UL

| Model        | V   | Hz | m <sup>3</sup> /h | rpm  | W  | A    | Ã F | dB/A | kg | Curve |
|--------------|-----|----|-------------------|------|----|------|-----|------|----|-------|
| KS2D120-60S  | 220 | 50 | 255               | 2400 | 75 | 0.24 | 3   | 51   | -  | Pts   |
|              |     | 60 | 270               | 2500 | 80 | 0.30 |     | 53   |    | ←     |
| KS2D120-60S2 | 115 | 60 | 300               | 2750 | 86 | 0.70 | 8   | 53   | -  | ↑     |

