


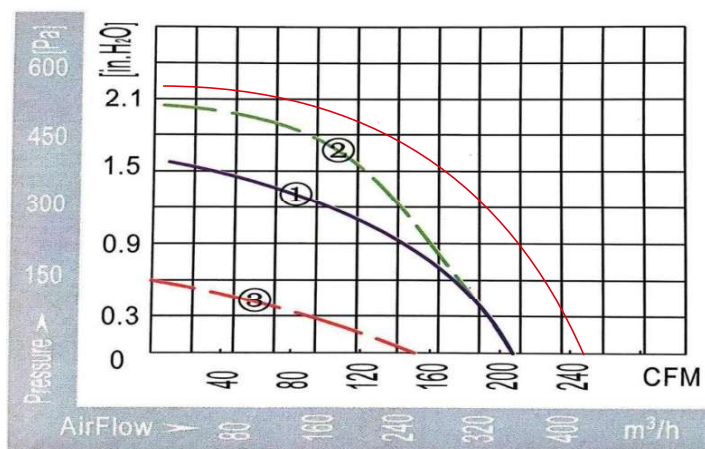

Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

Model	V	Hz	m³/h	rpm	W	A	Ä F	dB/A	kg	Curve
KS2D133-73S	220	50	400	2400	120	0.47	3.0	66	-	Pts
		60	350	2300	126	0.57		65		←
KS2D133-73S2	115	60	350	2200	153	1.25	10	67	-	←

