


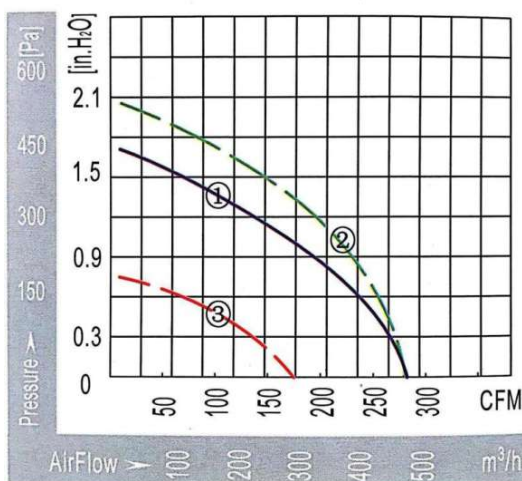

Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

Model	V	Hz	m ³ /h	rpm	W	A	Ä F	dB/A	kg	Curve
KS2D140-60S	220	50	460	2400	170	0.74	4	67	-	Pts
		60	470	2700	205	0.91		68		←
KS2D140-60S2	115	60	470	2700	215	1.78	16	69	-	←

