


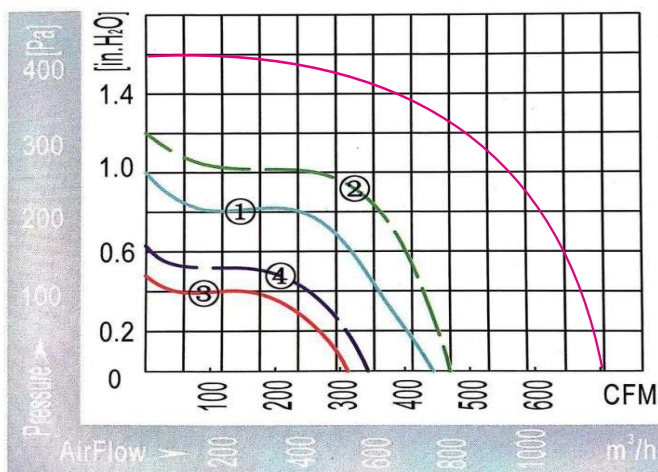

Material : Scroll Housing & Impellor made of
Galvanized Sheet Steel with Powder
Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector
(TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

Model	V	Hz	m ³ /h	rpm	W	A	Ä F	dB/A	kg	Curve
KS4D180-92S	220	50	1100	2000	500	2.2	14	65	-	Pts
		60	1100	2000	500	2.2		67		←
KS4S180-92S	380	50	1100	2000	500	2.2	-	65	-	Pts
		60	1100	2000	500	2.2		67		←
KS4D180-92S2	115	60	800	1500	145	1.80		67		←

