




Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally
Motor Insulation Class : F
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE, UL

Model	V	Hz	m³/h	rpm	W	A	Ã F	dB/A	kg	Curve
KS4D225-92S	220	50	1400	1380	400	1.82	10	73	-	Pts
KS4S225-92S	380	50	1400	1380	400	1.05	-	73	-	Pts

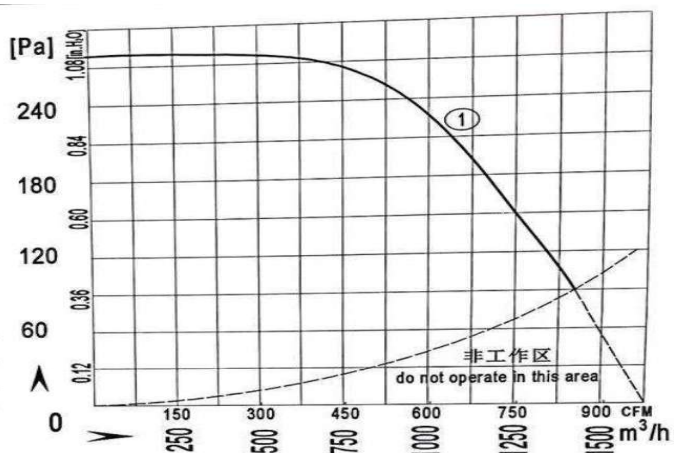