




Material : Impeller made of Plastic PA66
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1
Motor Insulation Class : F

Protection : Thermal Overload Protector (TOP) wired Internally
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SC190A1-AGT-04 (FH 190)	FW068-0202E12	230	50	470	276	2630	79	0.35	71	3/450
			60	530	312	2980	108	0.48	73	

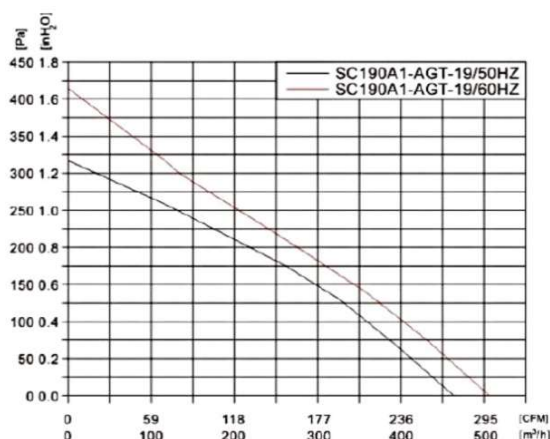