




Material : Impeller made of Plastic PA66
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1
Motor Insulation Class : F

Protection : Thermal Overload Protector (TOP) wired Internally
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m ³ /h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (μF/V)
SC220A1-AGT-03 (FH 220)	FW068-0202E12	230	50	750	441	2400	95	0.4	75	3/450
			60	800	471	2600	120	0.5	75	

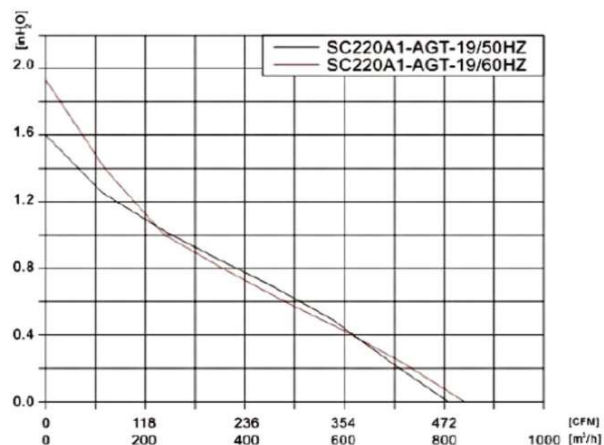