




Material : Impeller made of Plastic PA66
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1
Motor Insulation Class : F

Protection : Thermal Overload Protector (TOP) wired Internally
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE, UL, CUL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SC225A1-AGT-21 (FJ 225)	FW068-0352E73	230	50/60	1070/1200	629/706	2650/2950	141/176	0.7/0.77	78	4/450

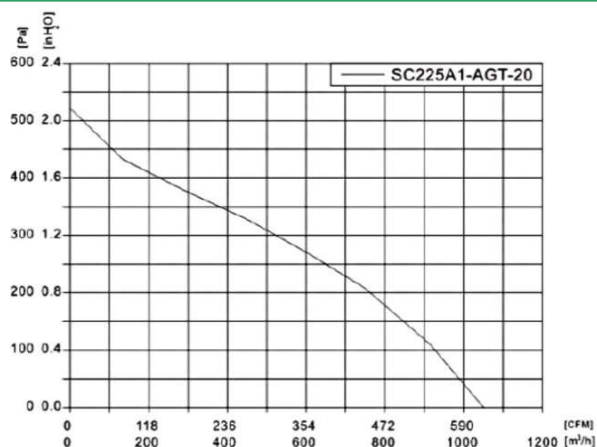