


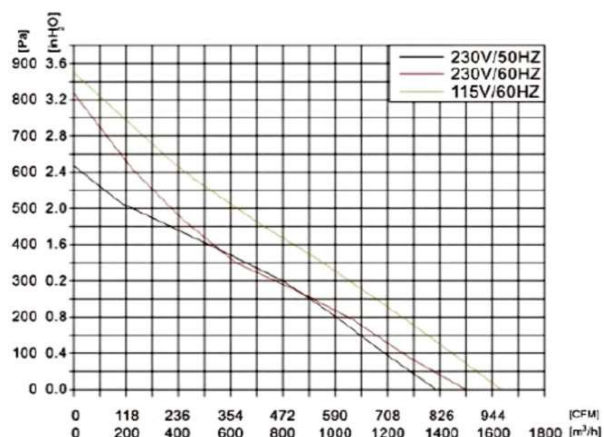

Material : Impeller made of Plastic PA66,
Galvanized Sheet Steel Plate

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Motor Insulation Class : F

Protection : Thermal Overload Protector
(TOP) wired Internally

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL, CUL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SC250A1-AGT-06 (FH 250)	AM068A1-AGT-01	230	50	1300	765	2600	173	0.76	78	5/450
			60	1380	812	2850	230	1.08	78	
SC250A1-AC6-16	AM068A1-AC6-16	115	60	1650	972	3000	290	2.6	82	25/250

