




Material : Impeller made of SPCC
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1
Motor Insulation Class : F

Protection : Thermal Overload Protector (TOP) wired Internally
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE, UL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (μF/V)
SC280A1-AG5-01 (FH 280)	AM068A1-AG5-02	230	50	1600	941	2500	245	1.06	75	8/450

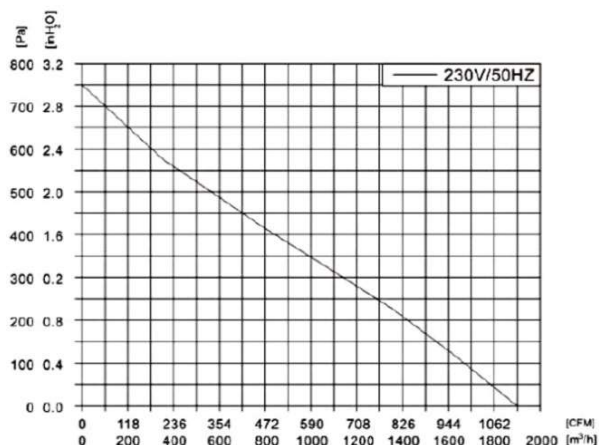