




Material : Impeller completely made of Sheet Aluminium
Type of protection : IP44
Bearing : Ball Bearings
Operation Mode : S1
Motor Insulation Class : F

Protection : Thermal Overload Protector (TOP) wired Internally
Direction of Rotation : Anticlockwise, see on the leads.
Amb. Temp : -40 ~ +60°C
Approvals : CCC, CE, UL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SC320A2-AGT-08 (FH 320)	FW074-0345E10	230	50	1800	1059	1390	123	0.55	72	4/450
			60	2000	1176	1580	162	0.75	72	
SH320A2-AC6-01	FW074-0354E30	115	60	2000	1265	1650	161	1.41	74	16/250

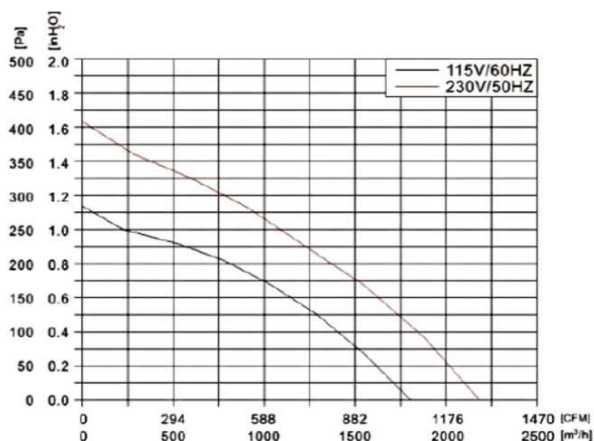