


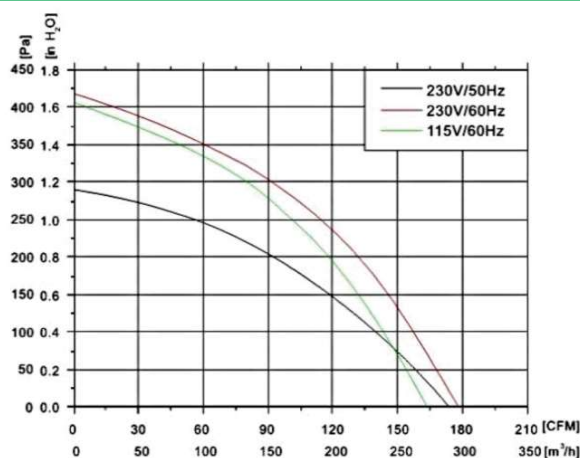

Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SH120A1-AGT-02 (FD 120)	FW068-0152E04	230	50	290	171	2180	81	0.37	70	2/450
			60	295	174	2210	95	0.42	71	
SH120A1-AC6-00	FW068-0152E03	115	60	270	159	2070	91	0.82	70	6/250

