


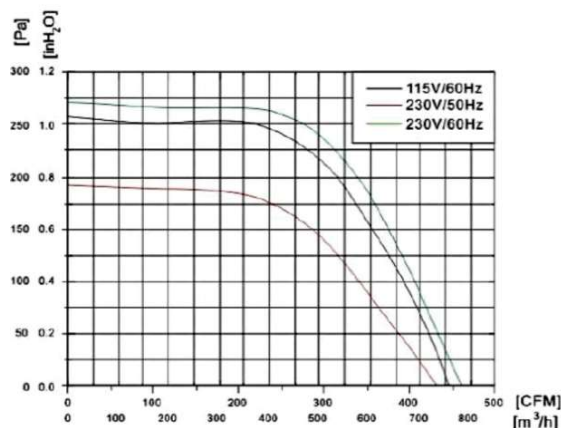

Material : Scroll Housing & Impellor made of Galvanized Sheet Steel with Powder Coating

Type of protection : IP44

Bearing : Ball Bearings

Operation Mode : S1

Protection : Thermal Overload Protector (TOP) wired Internally

Motor Insulation Class : F

Direction of Rotation : Anticlockwise, see on the leads.

Amb. Temp : -40 ~ +60°C

Approvals : CCC, CE, UL

TYPE	MOTOR	VOLTAGE (VAC)	FREQUENCY (Hz)	AIRFLOW (m³/h)	AIRFLOW (CFM)	SPEED (rpm)	POWER (W)	CURRENT (A)	NOISE (Lp:dB(A))	CAPACITOR (µF/V)
SH180A2-AGT-03 (FD 180)	FW074-0354E29	230	50	740	435	1320	140	0.61	72	5/450
			60	780	459	1420	188	0.82	72	
SH180A2-AC6-03	FW074-0354E29	115	60	770	453	1400	185	1.6	72	16/250

