



MSE FAN BLOWER

www.msefanblower.com






Professional • Honest • Human Oriented

AXIAL FAN MOTOR


AXIAL FAN MOTOR Φ 300



Suction (S) Throw (T)

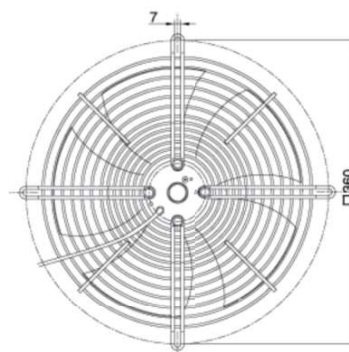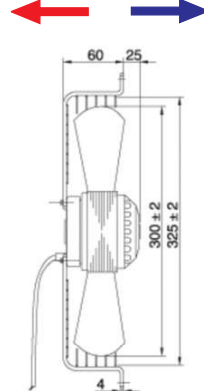

50Hz



60Hz

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	CURVE NO.	AIR VOLUME (m³/h)	SPEED (r/min)	INPUT (W)	CURRENT (A)	CAPACITANCE μF/450V	NOISE (dB(A))	NET (Kg)
YDWF68L35P2-360N-300	220	50	①	2220	2650	170	0.75	6	70	3
		60	②	2450	2950	210	0.90		73	
YSWF68L35P2-360N-300	415	50	①	2220	2500	150	0.50	/	70	3
		60	②	2450	2950	210	0.55		73	
YDWF68M4-360N-300	220	50	③	1810	1380	90	0.43	3	59	3
		60	④	2050	1630	96	0.44		62	
YSWF68M4-360N-300	415	50	③	1810	1380	90	0.30	/	59	3
		60	④	2050	1630	96	0.35		62	
YDWF68MG-360N-300	220	50	⑤	1420	920	55	0.23	2	55	3
		60	⑥	1640	1070	63	0.28		56	

Thermally Protected

Insulation Class - "F"

• IP 44

CE mark



EC SMART FAN

03