



MSE FAN BLOWER







www.msefanblower.com

Professional • Honest • Human Oriented

AXIAL FAN MOTOR Φ800



Suction (S) Throw (T)

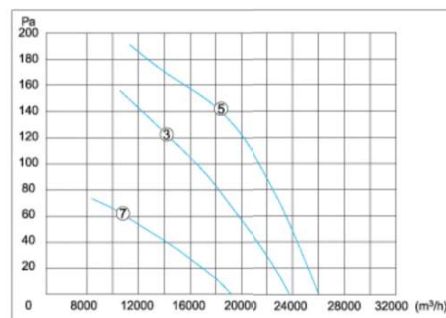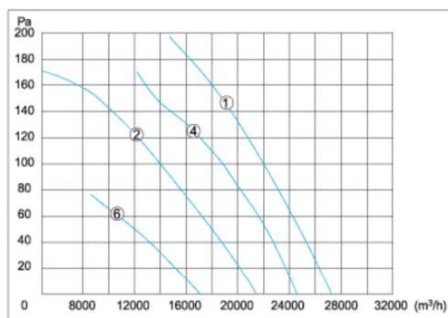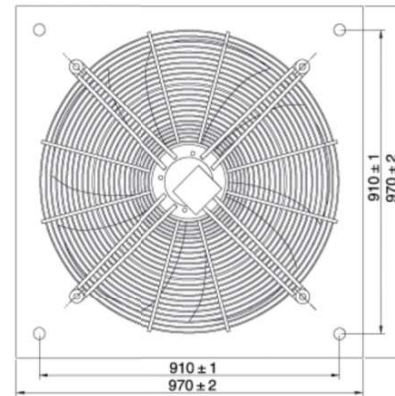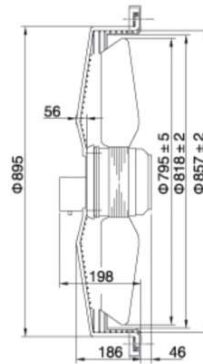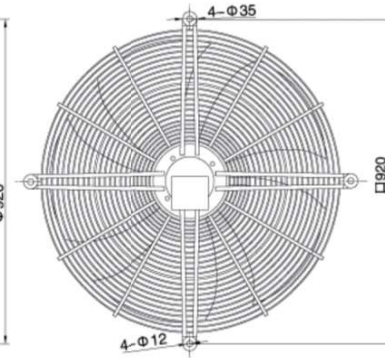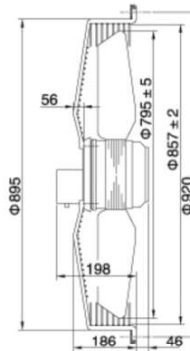

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	CURVE NO.	AIR VOLUME (m³/h)	SPEED (r/min)	INPUT (W)	CURRENT (A)	NOISE (dB(A))	NET (Kg)
YSWF127L65P4-920N-800	415	50	❶	27200	1400	1600	3.2	88	28
YSWF127L65P6-920N-800	415	50	❷	21500	920	1100	2.4	83	27
		60	❸	23800	1060	1370	2.57	85	
YSWF127L80P6-920N-800	415	50	❹	24300	930	1400	3.4	84	31
		60	❺	26000	1070	1750	3.45	87	
YSWF127L65P8-920N-800	415	50	❻	17200	680	650	1.5	75	27
		60	❼	19000	805	820	1.52	77	

Note : Three Phase fan with Six Terminals, Δ and Y connection method given

Thermally Protected

Insulation Class - "F"

• IP 54

CE mark

AXIAL FAN MOTOR

12

AIR COOLER FAN



EC SMART FAN