




MSE FAN BLOWER

www.msefanblower.com







Professional • Honest • Human Oriented

AXIAL FAN MOTOR

AXIAL FAN MOTOR Φ900

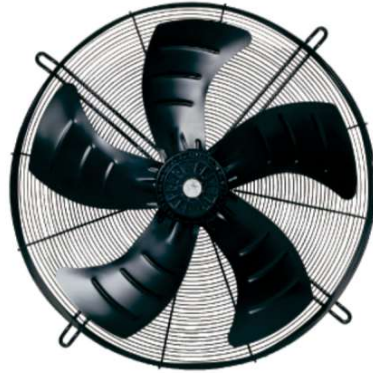

Suction (S) Throw (T)

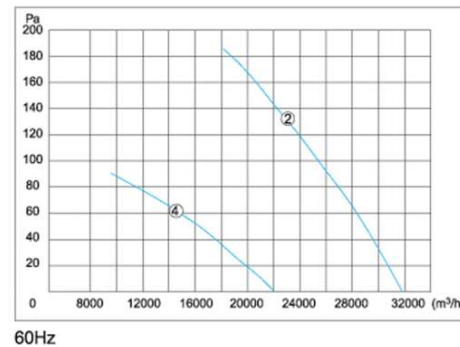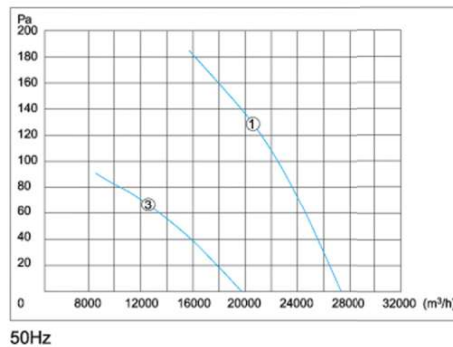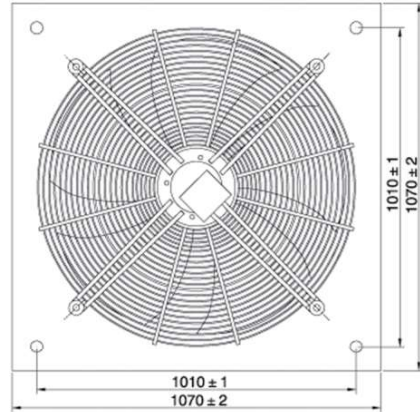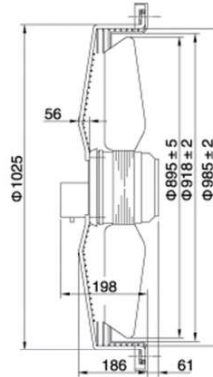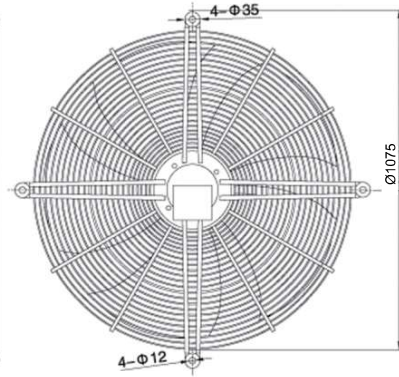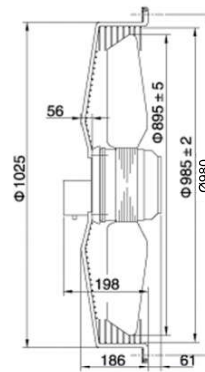

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	CURVE NO.	AIR VOLUME (m³/h)	SPEED (r/min)	INPUT (W)	CURRENT (A)	NOISE (dB(A))	NET (Kg)
YSWF127L80P6-1075N-900	415	50	❶	27200	905	1600	3.5	85	33
		60	❷	31800	1070	1750	3.45	88	
YSWF127L80P8-1075N-900	415	50	❸	19800	685	860	1.8	77	33
		60	❹	22000	810	1050	1.96	79	

Note : Three Phase fan with Six Terminals, Δ and Y connection method given

Thermally Protected

Insulation Class - "F"

• IP 54

CE mark



EC SMART FAN

13